




- Instilation** :Surface Mounted / Recessed Mounted / Gypsum Board
Surface-By using FANTOM frame accessory fitting can be install as surface
Recessed-Direct recessed instalition
Gypsum-Instilation into gypsum board ceiling with visible supporting structure moduls
- Optic System** :Opal Diffuser + Protective Glass
- Housing** :Sheet Steel White Painted
- Diffuser** :PMMA / PS-Tempered Glass
- Life Time** :100.000 Hours / LM80



Endüstri ve Mühendislik
Industry and Engineering

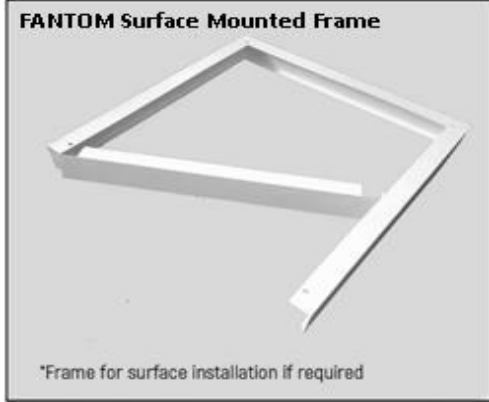

Eğitim / Education




Sağlık / Healt



Ofis / Office



Konaklama / Accommodation

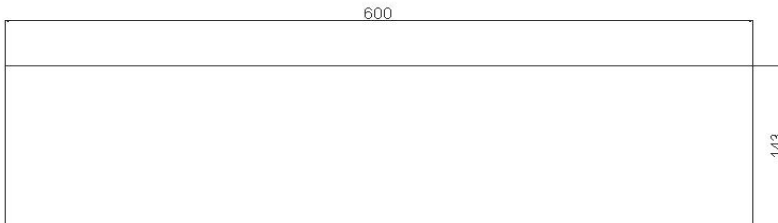

CODE	DIMENSIONS	NET WEIGHT	POWER	LUMEN	COLOUR TEMP.	COLOUR RENDIRING INDEX
031001	600x600x143	5,80 kg.	32 W	>4100	3000K / 4000K / 6500K	80 + CRI (Ra)